





MICROSEISMIC MONITORING FOR CARBON STORAGE

Microseismic monitoring is a seismic technique for tracking the subsurface behavior of carbon dioxide (CO₂) during carbon capture and storage (CCS) projects. CCS involves the capture of CO₂ emissions from industrial sources, such as power plants or refineries, and the long-term storage of that CO₂ underground in geological formations like depleted oil and gas reservoirs or saline aquifers.

Microseismic monitoring utilizes an array of sensitive seismic sensors placed at the surface or in shallow boreholes to detect and locate small seismic events that occur within or in the vicinity of the storage reservoir. These microseismic events are typically caused by the changes in formation pressure and stress in response to the injection and migration of the injected CO_2 .

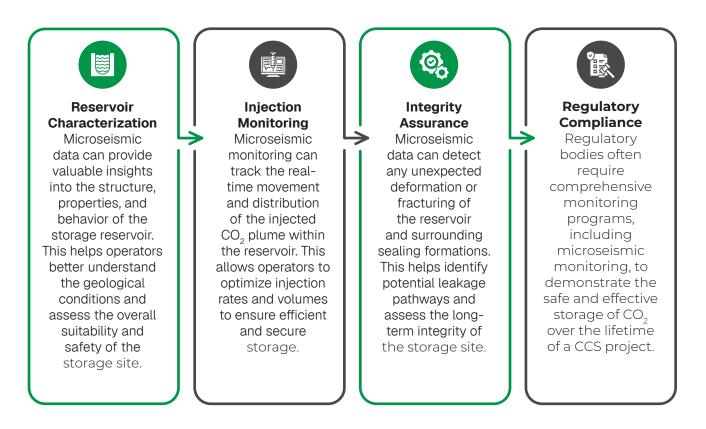

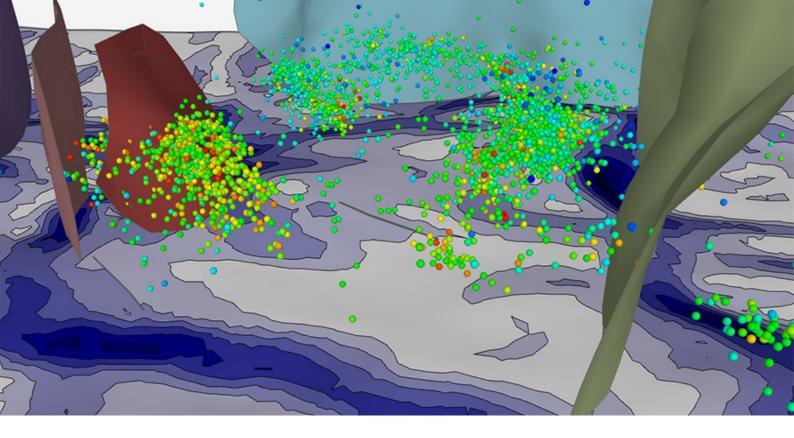

SERVICE OFFERINGS

Services



Network planning and optimization

- Optimize number and location of seismic stations
- Detection threshold analysis
- Establish pre-injection microseismic activity as baseline for monitoring



Real-time data ingestion, curation, and processing

- Automated data curation and processing
- Event detection and localization
- Anomaly alerting and reporting



Event analysis and further interpretation

- Detailed analysis of events with respect to injection activities
- Interpretation of events with respect to CO₂ plume position, pressure distribution and CO₂ containment

Value for your project



Cost efficiency

- Optimized monitoring system
- Automated, cloud-based processing, event detection and data storage
- Establish pre-injection microseismic activity as baseline for monitoring



Risk mitigation

- Early identification of induced seismicity outside expected region or along faults
- Adjustment of operational parameters if unexpected seismic activity is detected




Expert support

- Deep expertise in microseismic monitoring
- Experience from CCS and geothermal projects

MICROSEISMIC PLANNING AND PROCESSING

Optimize number and location of stations according to surface constraints and sources of noise

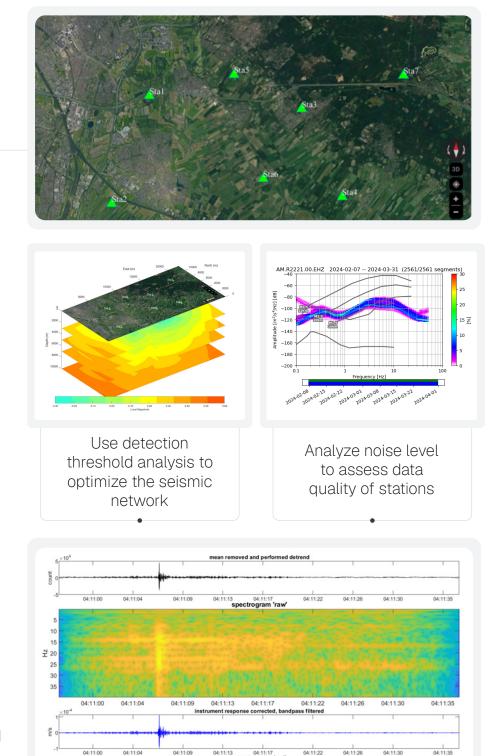

Proven and automated processing steps for data curation, event detection and localization

04:11:00

04:11:04

04:11:0

04:11:35

04:11:30

Microseismic monitoring is typically conducted in conjunction with other monitoring techniques, such as surface and downhole pressure and temperature measurements, satellite and aerial imaging, and soil gas monitoring. Together, these various monitoring methods provide a robust and comprehensive assessment of the CCS project's performance and environmental impact.

As CCS technology continues to evolve and more largescale projects are deployed, microseismic monitoring will remain a critical tool for ensuring the safe and effective storage of captured CO_2 for decades to come.

Carbon Guardian has extensive experience in microseismic monitoring for geothermal and CCS projects. Our optimization process for design of monitoring system utilizes state of the art processing algorithms and advanced technologies to analyze and interpret detected events.



 CO_2 sequestration is a necessary tool to reduce climate gas emissions. We want to derisk CO_2 sequestration and lower its cost in order to maximize stored CO_2 volumes contributing to achieving global net-zero goals and constraining global warming



CARBON GUARDIAN LLC

Houston, USA & The Hague, Netherlands info@carbonguardian.com

www.carbonguardian.com